


# OmegaFlex® - Our Reputation is Stainless

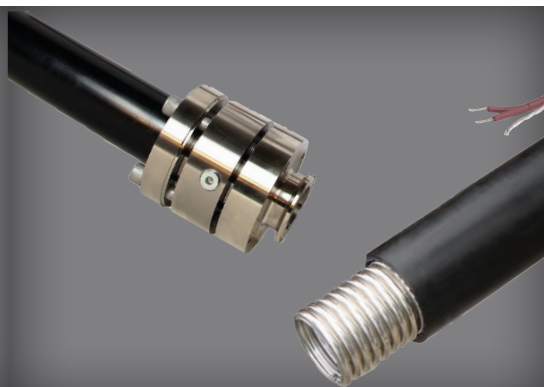

- All Stainless Steel Construction
- 100% Helium Leak Tested
- Rated for All Fuels
- Full Vacuum Rated
- UL 2039 Listed for Flexible Connector Piping for Fuels

- Continuous Double Wall Piping
- Stainless Steel T316L Primary Pipe
- 30 Year Underground Warranty
- 15 Year Above Ground Warranty
- Compatible with All Current and Future Fuels
- UL 971A listed for Metallic Underground Fuel Pipe
- UL 1369 Listed for Aboveground Piping for Flammable and Combustible Liquids

- Single Wall for DEF
- Meets ISO 22241-3 Standard
- Stainless Steel Type 316L Primary Pipe
- Available in Uninsulated, and Insulated with Heat Trace

[doubletrac.net](http://doubletrac.net)

## Product Specifications / DoubleTrac® Continuous Double Wall Piping

Size	Part No.	Description	Work Pressure (psig)	Minimum Bend Radius (inches)	Weight (LBS/ FT)	Lengths	Operating Temperature
1"	UGF-FSP-16	1" Continuous Double Wall Piping	125 Primary 50 Secondary	12	.75	up to 1000 ft.	Underground: -40° F to 150° F  Aboveground: -22° F to 122° F
1 1/2"	UGF-FSP-24	1 1/2" Continuous Double Wall Piping	100 Primary 50 Secondary	24	1.50	up to 1000 ft.	
2"	UGF-FSP-32	2" Continuous Double Wall Piping	75 Primary 50 Secondary	32	2.00	up to 1000 ft.	

## DEF-Trac® Piping Specifications

Size Nominal I.D.	Part No.	Reel Lengths (FT)	Description	Max Operating Pressure (psig)	Minimum Bend Radius (inches)	Nominal O.D.
1"	DF-FSP-16	200, 150, 100	DEF-Trac Flexible Piping: Uninsulated without heat trace	50	7	1.41
1 1/2"	DF-FSP-24	200, 150, 100		50	12	1.93
2"	DF-FSP-32	200, 100		50	14	2.51
1"	DF-FSPHT-16	200, 150, 100, 50	DEF-Trac Flexible Piping: Insulated with heat trace	50	18	2.65
1 1/2"	DF-FSPHT-24	200, 100, 50		50	30	3.15
2"	DF-FSPHT-32	200, 100, 50		50	35	3.50

Part numbers DF-FSP-16, 24 and 32 are available in Cut to Length reel quantities.

## DoubleTrac® Flex Connector Piping Specifications

Flex Connector Size	Max Allowable Working Pressure	Minimum Centerline Static Bend Radius	Nominal O.D.
3/4"	200psi	4"	1.10"
1"	100psi	4.5"	1.42"
1 1/2"	100psi	4.5"	1.95"
2"	100psi	5"	2.58"
3"	100psi	7.5"	4.01"

Common lengths available in 12", 15", 18", 24", 30" and 36". Custom lengths made to order.



Omega Flex, Inc.

451 Creamery Way, Exton, PA 19341-2509

Tel: 1-610-524-7272 Fax: 1-610-524-6484

Toll Free: 1-800-355-1039

DBT-209 / REV 11/20

For more information please visit us at

**doubletrac.net**

© Omega Flex, Inc. 2020